





**Floor LED Display
Built in interactive sensor**

LOB Version Specs Sheet




Model No.	LO1.5	LO1.95	LO2.6	LO2.97	LO3.91
Pixel Pitch (mm)	1.524mm	1.95mm	2.6mm	2.97mm	3.91mm
Led Lamp	SMD1212	SMD1515	SMD1515	SMD1515	SMD1921
Pixel Density (dot/ m ²)	430336	262144	147456	112896	65536
Cabinet Resolution	328*328	256*256	192*192	168*168	128*128
Weight (Kg/ Cabinet)	12kg	12kg	12kg	12kg	12kg
Refresh Rate (Hz)	3840	3840	3840	3840	3840
Brightness (cd/ m ²)	800-1200nit				
Life span	≥ 100,000Hours				
Greyscale	14bit				
MAX Wattage (W/ m ²)	800W				
Working Wattage (W/ m ²)	300W				
IP Grade	IP67/IP54				
Input Voltage	AC100~240V 50/60Hz				
Module Size(mm)	250mm*250mm				
Cabinet Size (mm)	500mm*500mm*89mm				
Maintenance	Back				
Working Environment	Temperature -20~50℃				

Mask Version Specs Sheet

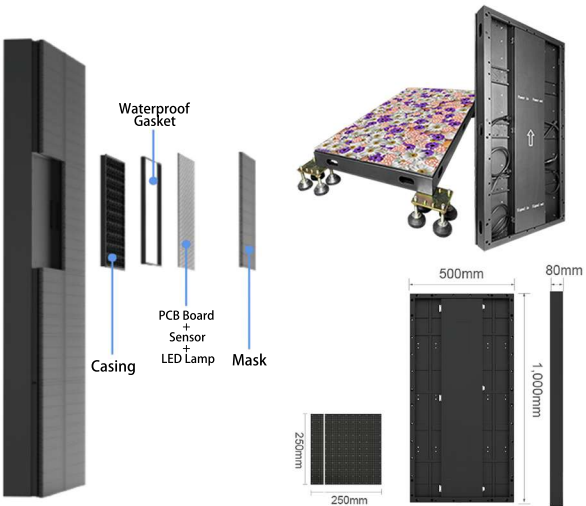

Model No.	MA2.5	MA2.6	MA2.97	MA3.91	MA4.81	MA5.2
Pixel Pitch (mm)	2.5mm	2.6mm	2.97mm	3.91mm	4.81mm	5.2mm
Led Lamp	SMD1415	SMD1415	SMD1415	SMD1921	SMD1921	SMD1921
Pixel Density (dot/ m ²)	160000	147456	112896	65536	43264	36864
Cabinet Resolution	200*200	192*192	168*168	128*128	104*104	96*96
Weight (Kg/ Cabinet)	12kg	12kg	12kg	12kg	12kg	12kg
Refresh Rate (Hz)	3840	3840	3840	3840	3840	3840
Brightness (cd/ m ²)	800-1200nit					
Life span	≥ 100,000Hours					
Greyscale	14bit					
MAX Wattage (W/ m ²)	800W					
Working Wattage (W/ m ²)	300W					
IP Grade	IP67/IP54					
Input Voltage	AC100~240V 50/60Hz					
Module Size(mm)	250mm*250mm					
Cabinet Size (mm)	500mm*500mm*89mm					
Maintenance	Back					
Working Environment	Temperature -20~50℃					

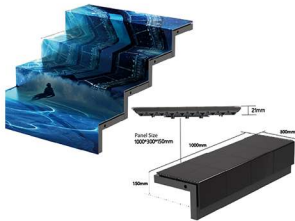

Stair LED Display Specs Sheet



Model No.	ST2.97
Pixel Pitch (mm)	2.97mm
Led Lamp	SMD1515
Pixel Density (dot/ m ²)	112896
Cabinet Resolution	168*168
Weight (Kg/ Cabinet)	12kg
Refresh Rate (Hz)	3840
Brightness (cd/ m ²)	800-1200nit
Life span	≥ 100,000Hours
Greyscale	14bit
MAX Wattage (W/ m ²)	800W
Working Wattage (W/ m ²)	300W
IP Grade	IP67/IP54
Input Voltage	AC100~240V 50/60Hz
Module Size(mm)	250mm*250mm
Cabinet Size (mm)	1000mm*300mm*66mm / 1000*150mm*66mm
Maintenance	Back
Working Environment	Temperature -20~50℃